

Phone# 1-800-321-3310
 (216) 362-7500
 Fax# (216) 362-0999

A.C. STATOR DATA

SCS SPEC: _____



| | | | |
|--------------|------|---------------------------|-----------------|
| Manufacturer | | Frame | Customer: |
| HP | | Serial | Data by: |
| KW | | Type | Date: |
| RPM | | Rise (°C) HZ PH | Phone: |
| Volts | Amps | Motor Appl. | Purchase Order: |


Straight Time Over Time

| | | | |
|---------------------------------------|----------------|--------------------------------------|---------------------|
| 1. Core Bore | 1. | 21. Op. Conn. End Extension | 21. |
| 2. Core Length | 2. | 22. Small Drop (Req'd if #7 is No) | 22. |
| 3. Finger Plate | 3. | 23. Large Drop (Req'd if #7 is No) | 23. |
| 4. Vents: (A) Qty. (B) Width | 4. (A) (B) | 24. No. of Slots/Coils | 24. |
| 5. Back Iron | 5. | 25. Coil Throw Slot 1 - | 25. |
| 6. Average Tooth Width | 6. | 26. Turns per Coil | 26. |
| 7. Coil Supports (Steel) | 7. Yes (or) No | 27. Wires in Parallel | 27A. High |
| 8. Conn. Support Ring From Core | 8. #1 #2 | | 27B. Wide |
| 9. Conn. Support Ring I.D. | 9. #1 #2 | 28A. Wire Size | 28A. X |
| 10. Op. Conn. Support Ring From Core | 10. #1 #2 | 28B. Wire Size | 28B. X |
| 11. Op. Conn. Support Ring I.D. | 11. #1 #2 | 28C. Wire Size | 28C. X |
| 12. Clearance Coil-Baffle (Conn.) | 12. | 28D. Wire Size | 28D. X |
| 13. Clearance Coil-Baffle (Op. Conn.) | 13. | 29. Strand Insulation (as found) | 29. |
| 14. Total Slot Depth | 14. | 30. Weight per Coil | 30. Lbs. Oz. |
| 15. Slot Depth Under Wedge | 15. | 31. Jumpers (circle) | 31. 1-4 1-7 |
| 16. Slot Width | 16. | 32. Connection (circle) | 32. Star Delta |
| 17. Overall Coil Length | 17. | 33. Number of Circuits | 33. |
| 18. Top Straight Length | 18. | 34. Coil Grouping | 34. |
| 19. Bottom Straight Length | 19. | 35. Insulation Class Req'd. (circle) | 35. VPI Dip & Bake |
| 20. Conn. End Extension | 20. | | Hermetic F H Sealed |



Winding Requirements

Liner to be used: Yes (or) No (Thickness) _____
 Complete Wdg. Supplies _____ Slot Fillers Only _____
 Wedges: Yes (or) No
 Tin Leads: Yes (or) No

Special Instructions

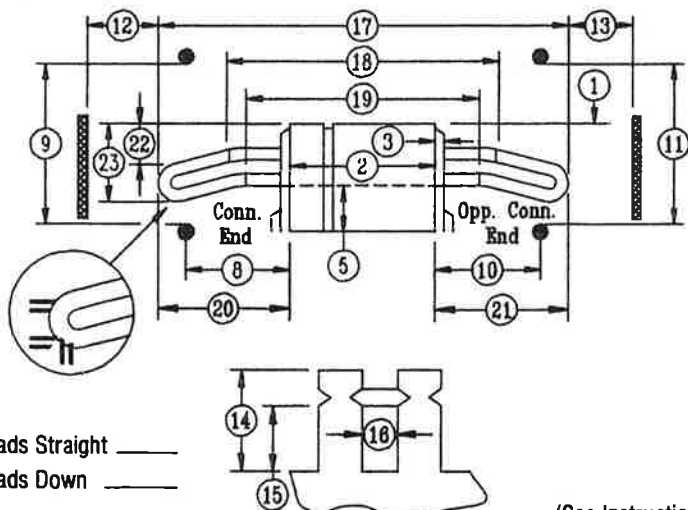

Leads Straight _____
 Leads Down _____

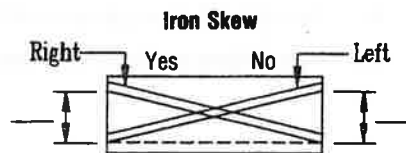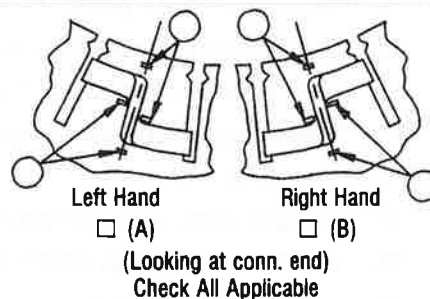

(See Instructions On Back)

(Circle All Applicable)